



COMMENT SAUVEGARDER UNE SÉQUENCE AVEC SMARTPSS




Sécurité

Cam-Install

Caméras Câblage Technologies

ÉTAPE 1 SÉLECTIONNEZ PLAYBACK

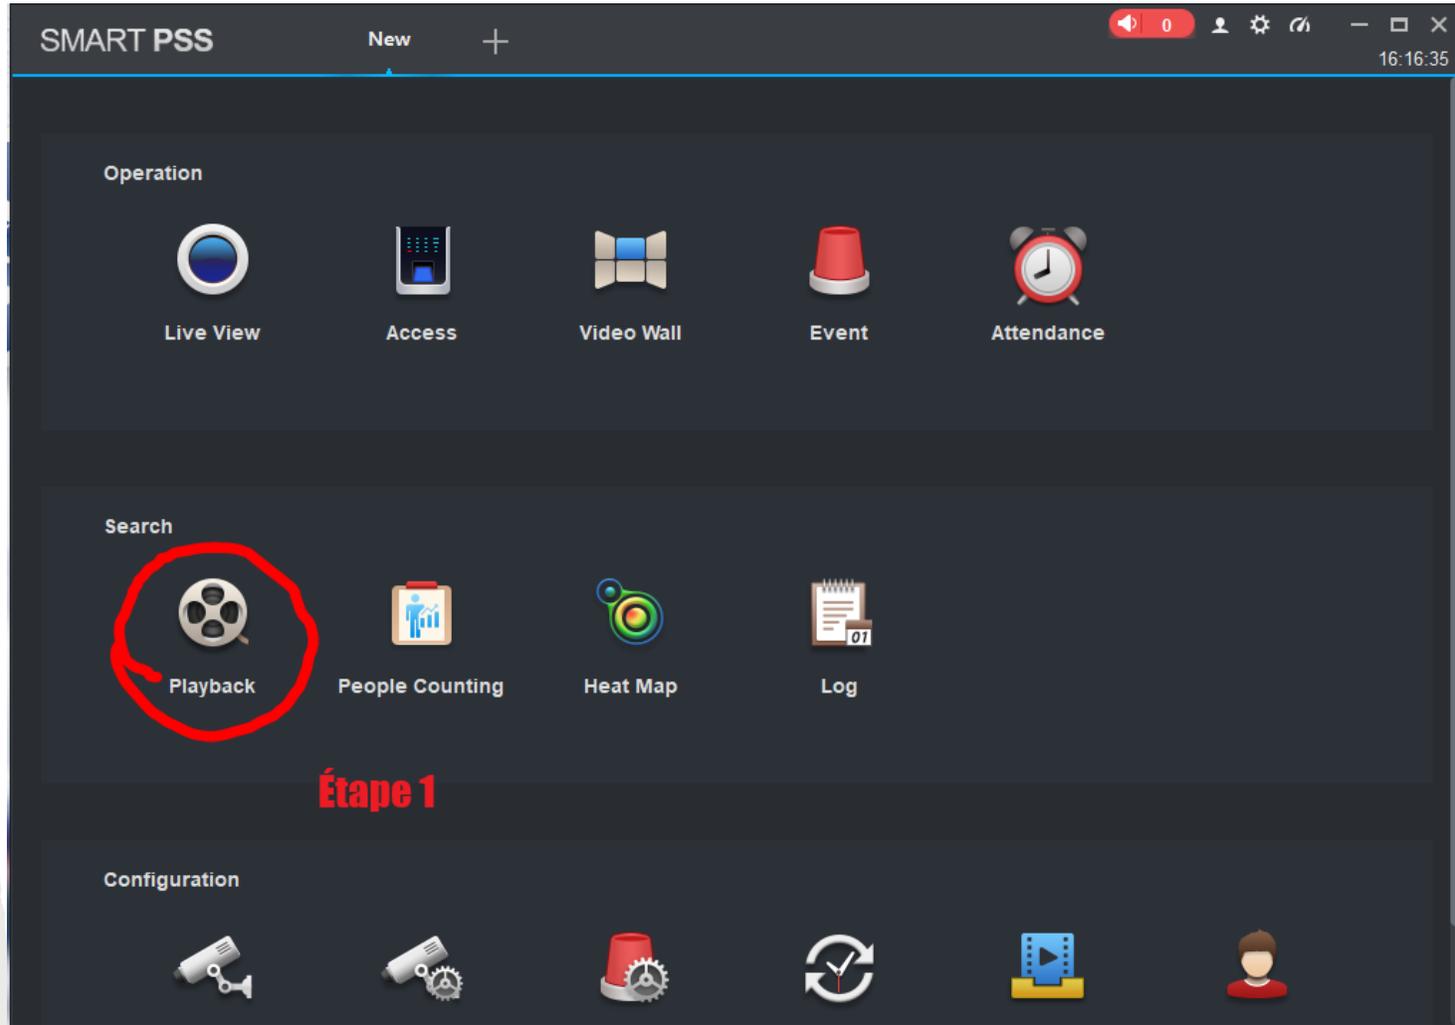

Sécurité
Cam-Install
Caméras Câblage Technologies

ÉTAPE 2 CHOISIR LA CAMÉRA

The screenshot shows the SMART PSS software interface. The left sidebar contains a tree view of devices. Under the 'Default Group', the 'Atelier P Mondo' folder is expanded, and 'Pompe 1' is selected with a red circle. The main area is a dark grid with the text 'Étape 2' in red. The bottom of the interface features a playback timeline and control buttons.

SMART PSS Playback +

Device Local

Device

Search..

Default Group

AX Hotel

AX Hotel IP

Atelier P Mondo

Pompe 1

Pompe 2

Pompe 3

View

Record Picture

Record Type: All Records

Stream Type: Main Stream

Time: 12/05 00:00-12/05 23:59

Search

02:00 04:00 06:00 08:00 10:00 12:00 14:00 16:00 18:00 20:00 22:00 00:00

16



ÉTAPE 3 SÉLECTIONNER LA DATE DE L'ÉVÈNEMENT

The screenshot shows the SMART PSS Playback interface. The left sidebar contains a search filter menu with the following options:

- Device: Local
- Device: Search...
- Default Group
 - AX Hotel
 - AX Hotel IP
- Atelier P Mondot
 - Pompe 1
 - Pompe 2
 - Pompe 3
- View: Record (selected) / Picture
- Record Type: All Records
- Stream Type: Main Stream
- Time: 12/05 00:00-12/05 23:59 (highlighted with a red circle)

The main playback area shows a timeline from 02:00 to 00:00. The text "Étape 3" is overlaid in red on the timeline. The bottom of the interface features playback controls and a status bar.



ÉTAPES 4-5-6

4 - CHOIX DE LA DATE

5 - CHOISIR L'HEURE DE DÉBUT

6 - CHOISIR L'HEURE DE FIN

The screenshot shows the SMART PSS Playback interface. The left sidebar contains a device tree with 'Pompe 1' selected. The main area displays two calendar views for December 2021. The 'Start' calendar has the 5th of December highlighted with a blue circle. The 'End' calendar has the 2nd of December highlighted with a red circle. Below the calendars, the 'Time' field shows '2021-12-05 00:00:00' and '2021-12-02 23:59:59', both highlighted with red circles. A red vertical line is drawn between the two calendar views, with the text 'Étape 4' to its right. Below the red line, the text 'Étapes 5 et 6' is written. The interface also includes a search bar, record type dropdown, stream type dropdown, and playback controls at the bottom.

SMART PSS Playback +

Device Local

Device

Search...

Default Group

- AX Hotel
- AX Hotel IP
- Atelier P Mondou
 - Pompe 1
 - Pompe 2
 - Pompe 3

View

Record Picture

Record Type: All Records

Stream Type: Main Stream

Time: 2021-12-05 00:00:00 - 2021-12-02 23:59:59

Search

Étape 4

Étapes 5 et 6



Sécurité
Cam-Install
Caméras Câblage Technologies

ÉTAPES 7-8

7 - CLIQUEZ SUR
'SEARCH'

8 - CLIQUEZ SUR 'PLAY'

The screenshot displays the SMART PSS Playback interface. On the left sidebar, the 'Search' button is highlighted with a red circle and labeled 'Étape 7'. At the bottom of the interface, the 'Play' button is highlighted with a red circle and labeled 'Étape 8'. The main area shows a timeline with yellow bars representing recorded data. The top right corner shows system icons and the time 16:43:08.



Sécurité
Cam-Install
Caméras Câblage Technologies

ÉTAPES 9-10-11

9 - CLIQUEZ SUR LE
CISEAU

10 - SÉLECTIONNEZ LA
PLAGE DÉBUT DE LA
SÉQUENCE

11 - SÉLECTIONNEZ LA FIN
DE LA SÉQUENCE ET
CLIQUEZ SUR LE CISEAU

SMART PSS Playback + 16:46:25

Device Local

Device

Search...

- Default Group
- AX Hotel
- AX Hotel IP
- Atelier P Mondou
 - Pompe 1
 - Pompe 2
 - Pompe 3

View

Record Picture

Record Type: All Records

Stream Type: Main Stream

Time: 12/01 08:00-12/01 10:00

Search

Channel 1

Étape 9

Étape 10

Étape 11

Start: 2021-12-01 09:10:39
End: 2021-12-01 10:10:39
Duration: 00:18:00



ÉTAPE 12
CHOISISSEZ LE
DOSSIER OU
EXPORTER VOTRE
SÉQUENCE ET
CHOISISSEZ LE
FORMAT .AVI ET
CLIQUEZ SUR OK

The screenshot displays the SMART PSS software interface. On the left, a sidebar shows a device tree with 'Atelier P Mondou' expanded to show 'Pompe 1', 'Pompe 2', and 'Pompe 3'. The main area shows a live video feed of a gas station with a white sign that says 'libre-service'. An 'Export Setup' dialog box is open in the center, highlighted with a red circle. The dialog box contains the following fields and buttons:

- Path: SmartPSS\Record\Download\ [Browse]
- Export Format: AVI
- Export SmartPlayer Player! (checkbox)
- Free Space: 82940MB
- OK [OK] Cancel [Cancel]

The background video feed shows a gas station with a white sign that says 'libre-service'. The time in the top right corner is 2021-12-01 09:04:37. The bottom of the interface shows a timeline and playback controls.



ÉTAPE 13

L'EXPORTATION S'EFFECTUE. IL NE RESTE QU'À PATIENTER ET PAR LA SUITE COPIER LE FICHER SUR UNE CLÉ USB OU UN DISQUE EXTERNE

SMART PSS Playback +

Device Local

Device

Search...

Default Group

AX Hotel

AX Hotel IP

Atelier P Mondou

Pompe 1

Pompe 2

Pompe 3

View

Record Picture

Record Type: All Records

Stream Type: Main Stream

Time: 12/01 08:00-12/01 10:00

Search

Export Progress

Exporting Exported

Pause Start Delete

All	Start Time	End Time	Size(KB)	Status	Operation
<input type="checkbox"/>	2021-12-01 08:45...	2021-12-01 09:45...	403859		🗑️ 📁

Exported Size: 2112 KB

Do not pop up the next time!

Étape 13





Des questions?
Contactez-nous 450 233-2474



Sécurité

Cam-Install

Caméras Câblage Technologies